



Cable ID: DINTEK-6A-UTP-CH1

Test Summary: PASS



Date / Time: 10/04/2009 08:40:40pm
Headroom: 7.2 dB (NEXT 36-45)
Test Limit: TIA Cat 6A Channel
 Cable Type: Cat 6A UTP

Operator: Your Name
 Software Version: 2.2200
 Limits Version: 1.3700
 NVP: 68.2%


Model: DTX-1800
 Main S/N: 8892011
 Remote S/N: 8892012
 Main Adapter: DTX-CHA001
 Remote Adapter: DTX-CHA001

Wire Map (T568B)



PASS





Length (ft), Limit 328	[Pair 45]	331
Prop. Delay (ns), Limit 555		525
Delay Skew (ns), Limit 50		32
Resistance (ohms)	[Pair 12]	16.7
Insertion Loss Margin (dB)	[Pair 78]	4.3
Frequency (MHz)	[Pair 78]	500.0
Limit (dB)	[Pair 78]	49.3

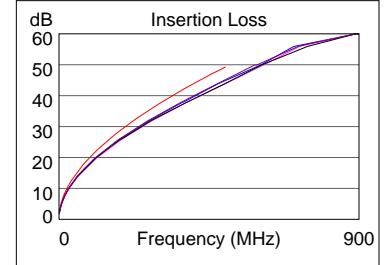



	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	36-45	12-36	36-45	36-45
NEXT (dB)	7.2	9.8	7.2	10.9
Freq. (MHz)	496.0	17.9	496.0	492.0
Limit (dB)	26.2	52.4	26.2	26.3
Worst Pair	36	36	36	36
PS NEXT (dB)	8.2	9.8	8.2	12.2
Freq. (MHz)	496.0	20.9	496.0	472.0
Limit (dB)	23.3	48.7	23.3	23.9

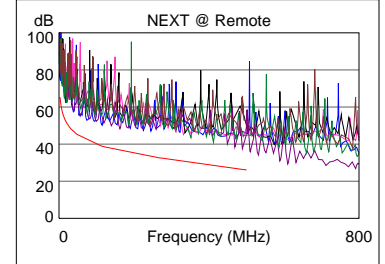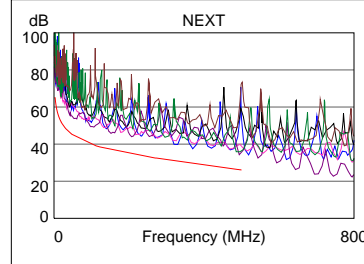



	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	36-78	36-78	36-78	78-36
ACR-F (dB)	10.9	10.9	11.9	13.3
Freq. (MHz)	79.0	77.3	493.0	482.0
Limit (dB)	25.3	25.5	9.4	9.6
Worst Pair	36	36	78	36
PS ACR-F (dB)	12.1	11.9	14.4	12.3
Freq. (MHz)	2.6	2.9	493.0	488.0
Limit (dB)	51.9	51.1	6.4	6.5

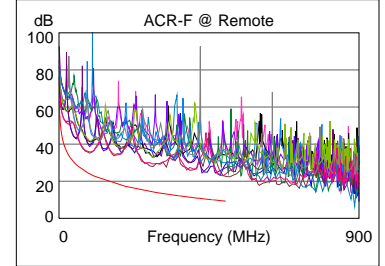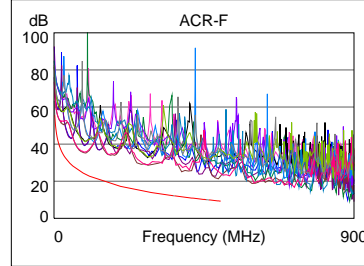

	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
N/A				
Worst Pair	36-45	12-36	36-45	36-45
ACR-N (dB)	10.2	10.8	12.5	16.1
Freq. (MHz)	3.3	17.9	496.0	492.0
Limit (dB)	60.7	43.8	-22.9	-22.6
Worst Pair	36	36	36	45
PS ACR-N (dB)	9.5	11.0	13.8	17.9
Freq. (MHz)	3.4	20.9	498.0	490.0
Limit (dB)	57.9	39.3	-25.9	-25.3

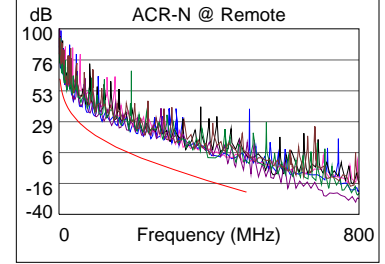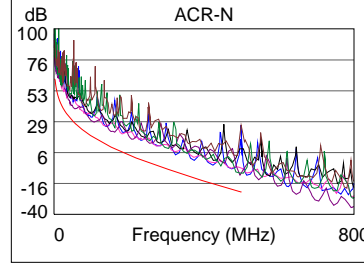

	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	12	45	12	78
RL (dB)	4.7	5.9	7.9	10.9
Freq. (MHz)	5.0	23.4	483.0	478.0
Limit (dB)	19.0	17.2	6.0	6.0

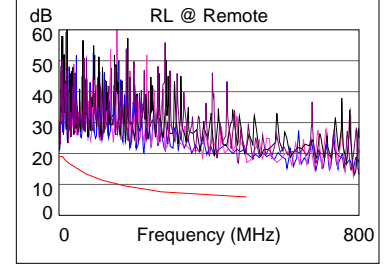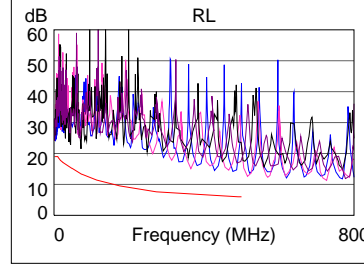

Compliant Network Standards:
 10BASE-T 100BASE-TX 100BASE-T4
 1000BASE-T 10GBASE-T ATM-25
 ATM-51 ATM-155 100VG-AnyLan
 TR-4 TR-16 Active TR-16 Passive



Cable ID: DINTEK-6A-UTP-CH2

Test Summary: PASS



Date / Time: 10/04/2009 08:42:28pm
Headroom: 5.6 dB (NEXT 36-78)
Test Limit: TIA Cat 6A Channel
 Cable Type: Cat 6A UTP

Operator: Your Name
 Software Version: 2.2200
 Limits Version: 1.3700
 NVP: 68.2%


Model: DTX-1800
 Main S/N: 8892011
 Remote S/N: 8892012
 Main Adapter: DTX-CHA001
 Remote Adapter: DTX-CHA001

Wire Map (T568B)



PASS





Length (ft), Limit 328	[Pair 45]	331
Prop. Delay (ns), Limit 555		527
Delay Skew (ns), Limit 50		33
Resistance (ohms)	[Pair 12]	16.7
Insertion Loss Margin (dB)	[Pair 12]	3.8
Frequency (MHz)	[Pair 12]	500.0
Limit (dB)	[Pair 12]	49.3

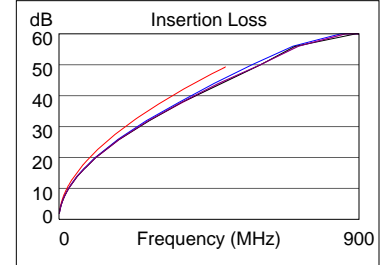



	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	36-45	36-78	36-45	36-45
NEXT (dB)	7.5	5.6	8.7	9.2
Freq. (MHz)	5.3	28.1	496.0	489.0
Limit (dB)	61.1	49.2	26.2	26.4
Worst Pair	36	36	36	36
PS NEXT (dB)	7.9	6.9	9.0	9.1
Freq. (MHz)	3.1	28.0	488.0	472.0
Limit (dB)	62.0	46.5	23.5	23.9

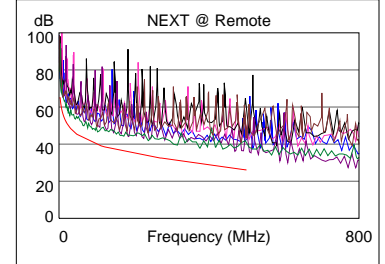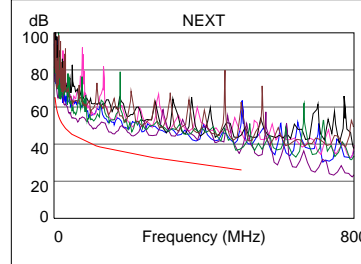



	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	78-36	36-78	78-36	36-78
ACR-F (dB)	10.6	10.6	13.5	12.6
Freq. (MHz)	2.1	2.1	470.0	445.0
Limit (dB)	56.7	56.7	9.8	10.3
Worst Pair	78	78	36	36
PS ACR-F (dB)	12.0	11.9	14.3	13.7
Freq. (MHz)	2.8	2.8	470.0	436.0
Limit (dB)	51.5	51.5	6.8	7.5

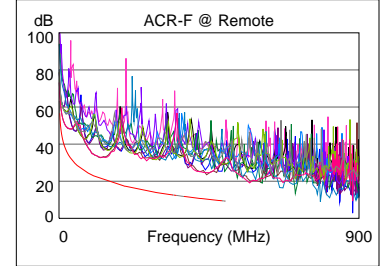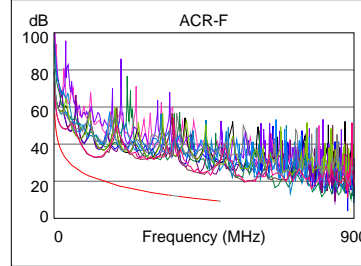

	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
N/A				
Worst Pair	36-45	36-78	36-45	36-45
ACR-N (dB)	8.1	6.7	13.2	13.9
Freq. (MHz)	5.3	28.0	496.0	490.0
Limit (dB)	56.4	38.4	-22.9	-22.4
Worst Pair	36	36	36	36
PS ACR-N (dB)	8.4	7.9	13.6	14.7
Freq. (MHz)	3.1	28.0	493.0	489.0
Limit (dB)	58.3	35.7	-25.5	-25.2

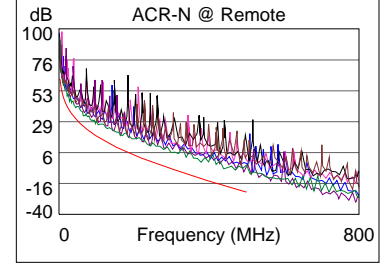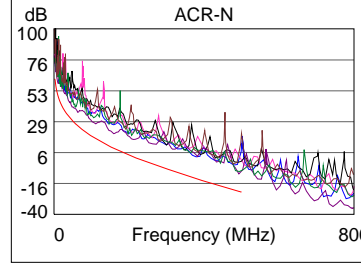

	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	12	45	36	78
RL (dB)	5.7	6.1	7.4	10.6
Freq. (MHz)	5.0	23.4	465.0	478.0
Limit (dB)	19.0	17.2	6.0	6.0

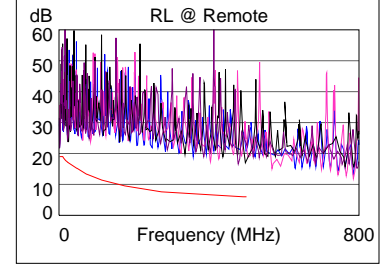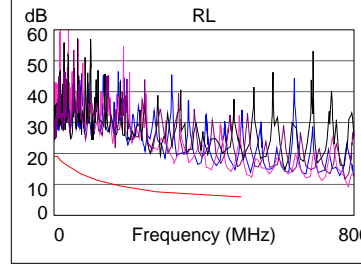

Compliant Network Standards:
 10BASE-T 100BASE-TX 100BASE-T4
 1000BASE-T 10GBASE-T ATM-25
 ATM-51 ATM-155 100VG-AnyLan
 TR-4 TR-16 Active TR-16 Passive



Cable ID: DINTEK-6A-UTP-CH3

Test Summary: PASS


Date / Time: 10/04/2009 08:43:26pm
Headroom: 5.6 dB (NEXT 36-45)
Test Limit: TIA Cat 6A Channel
 Cable Type: Cat 6A UTP

Operator: Your Name
 Software Version: 2.2200
 Limits Version: 1.3700
 NVP: 68.2%

Model: DTX-1800
 Main S/N: 8892011
 Remote S/N: 8892012
 Main Adapter: DTX-CHA001
 Remote Adapter: DTX-CHA001

Wire Map (T568B)



PASS





Length (ft), Limit 328	[Pair 45]	331
Prop. Delay (ns), Limit 555		524
Delay Skew (ns), Limit 50		30
Resistance (ohms)	[Pair 12]	16.7
Insertion Loss Margin (dB)	[Pair 78]	4.3
Frequency (MHz)	[Pair 78]	500.0
Limit (dB)	[Pair 78]	49.3





	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	36-45	12-45	36-45	36-45
NEXT (dB)	5.6	8.3	5.6	9.6
Freq. (MHz)	494.0	10.9	494.0	492.0
Limit (dB)	26.2	56.0	26.2	26.3
Worst Pair	36	12	36	36
PS NEXT (dB)	7.1	10.1	7.1	10.6
Freq. (MHz)	490.0	10.9	490.0	492.0
Limit (dB)	23.5	53.4	23.5	23.4

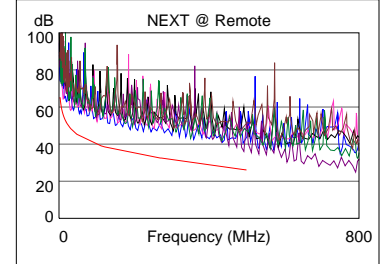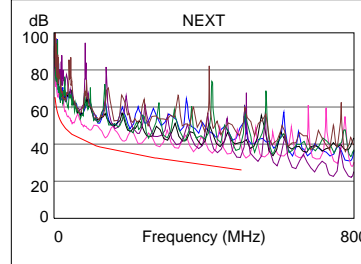



	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	36-78	36-78	36-12	36-12
ACR-F (dB)	10.4	10.4	12.6	13.9
Freq. (MHz)	2.1	2.1	436.0	490.0
Limit (dB)	56.7	56.7	10.5	9.5
Worst Pair	36	36	12	36
PS ACR-F (dB)	12.1	11.9	15.3	15.1
Freq. (MHz)	2.6	2.9	436.0	436.0
Limit (dB)	51.9	51.1	7.5	7.5

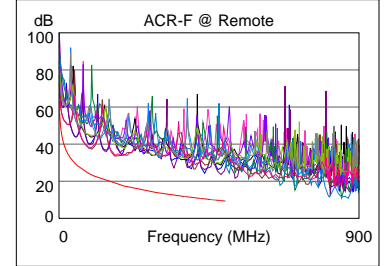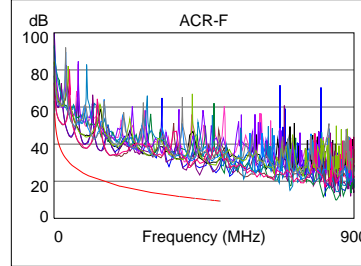

	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
N/A				
Worst Pair	12-45	12-45	36-45	36-45
ACR-N (dB)	7.2	9.1	10.6	14.7
Freq. (MHz)	48.3	10.9	494.0	492.0
Limit (dB)	30.9	49.2	-22.7	-22.6
Worst Pair	12	12	45	36
PS ACR-N (dB)	9.4	10.9	13.0	16.2
Freq. (MHz)	48.3	10.9	496.0	492.0
Limit (dB)	28.2	46.6	-25.8	-25.5

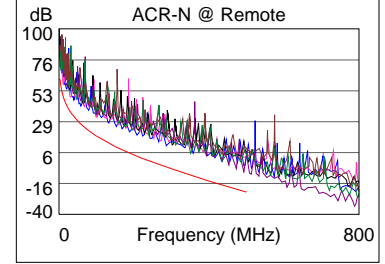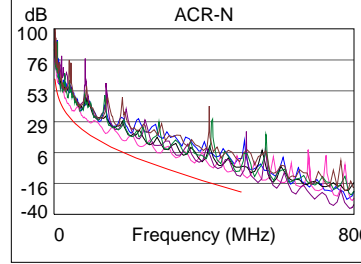

	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	12	12	12	12
RL (dB)	4.4	6.3	8.0	11.4
Freq. (MHz)	5.0	22.1	478.0	468.0
Limit (dB)	19.0	17.3	6.0	6.0

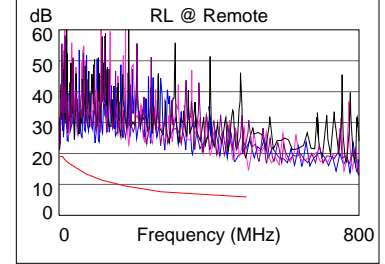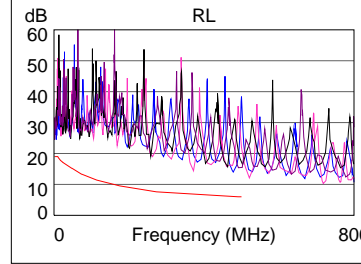

Compliant Network Standards:
 10BASE-T 100BASE-TX 100BASE-T4
 1000BASE-T 10GBASE-T ATM-25
 ATM-51 ATM-155 100VG-AnyLan
 TR-4 TR-16 Active TR-16 Passive



Cable ID: DINTEK-6A-UTP-CH4

Test Summary: PASS


Date / Time: 10/04/2009 08:49:43pm
 Headroom: 8.7 dB (NEXT 36-45)
 Test Limit: TIA Cat 6A Channel
 Cable Type: Cat 6A UTP

Operator: Your Name
 Software Version: 2.2200
 Limits Version: 1.3700
 NVP: 68.2%

Model: DTX-1800
 Main S/N: 8892011
 Remote S/N: 8892012
 Main Adapter: DTX-CHA001
 Remote Adapter: DTX-CHA001

Wire Map (T568B)



PASS





Length (ft), Limit 328	[Pair 45]	333
Prop. Delay (ns), Limit 555		529
Delay Skew (ns), Limit 50		32
Resistance (ohms)	[Pair 12]	16.9
Insertion Loss Margin (dB)	[Pair 12]	3.5
Frequency (MHz)	[Pair 12]	500.0
Limit (dB)	[Pair 12]	49.3





	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	36-45	36-45	36-45	36-45
NEXT (dB)	8.7	9.1	8.9	9.1
Freq. (MHz)	100.5	489.0	496.0	489.0
Limit (dB)	39.9	26.4	26.2	26.4
Worst Pair	36	36	36	36
PS NEXT (dB)	8.9	11.1	10.1	11.7
Freq. (MHz)	436.0	427.0	496.0	489.0
Limit (dB)	24.8	25.0	23.3	23.5

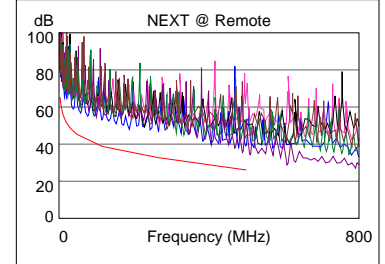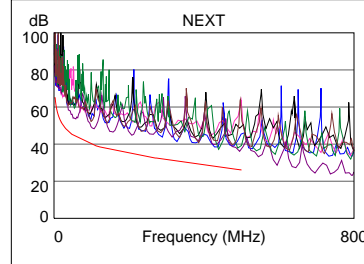



	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	36-78	36-78	36-12	12-36
ACR-F (dB)	10.0	10.0	12.1	13.1
Freq. (MHz)	2.0	2.0	475.0	475.0
Limit (dB)	57.2	57.2	9.7	9.7
Worst Pair	36	36	12	36
PS ACR-F (dB)	11.3	11.3	14.6	14.0
Freq. (MHz)	2.6	2.5	475.0	478.0
Limit (dB)	51.9	52.3	6.7	6.7

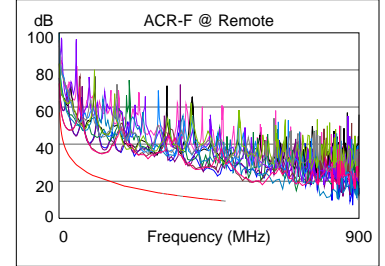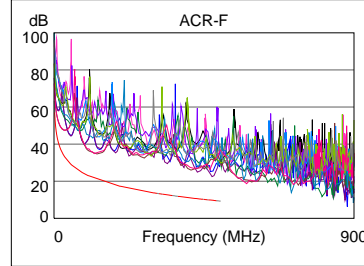

	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
N/A				
Worst Pair	36-45	36-78	36-45	36-45
ACR-N (dB)	10.4	11.5	13.5	13.6
Freq. (MHz)	56.0	3.0	496.0	489.0
Limit (dB)	28.7	61.4	-22.9	-22.3
Worst Pair	36	36	36	36
PS ACR-N (dB)	10.5	12.6	14.7	16.0
Freq. (MHz)	3.3	3.3	496.0	487.0
Limit (dB)	58.2	58.2	-25.8	-25.1

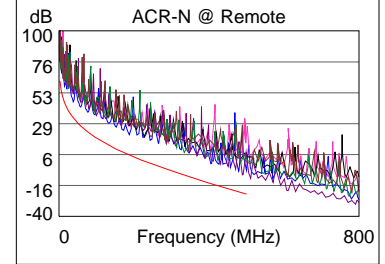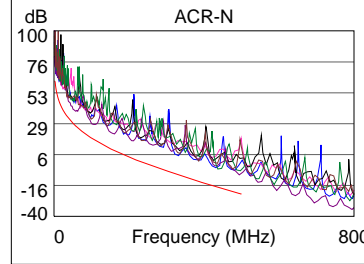

	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	12	12	36	78
RL (dB)	5.7	6.3	6.9	11.0
Freq. (MHz)	5.0	2.6	423.0	478.0
Limit (dB)	19.0	19.0	6.0	6.0

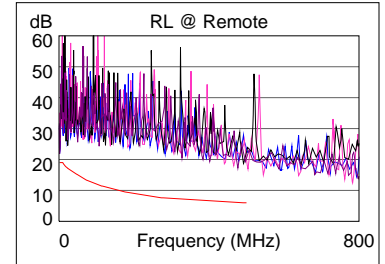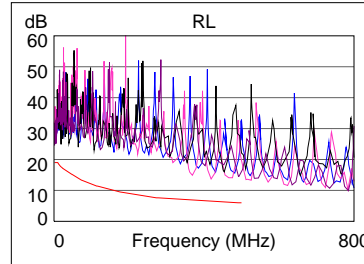

Compliant Network Standards:
 10BASE-T 100BASE-TX 100BASE-T4
 1000BASE-T 10GBASE-T ATM-25
 ATM-51 ATM-155 100VG-AnyLan
 TR-4 TR-16 Active TR-16 Passive



Cable ID: DINTEK-6A-UTP-CH5

Test Summary: PASS



Date / Time: 10/04/2009 08:50:46pm
Headroom: 6.4 dB (NEXT 36-45)
Test Limit: TIA Cat 6A Channel
 Cable Type: Cat 6A UTP

Operator: Your Name
 Software Version: 2.2200
 Limits Version: 1.3700
 NVP: 68.2%


Model: DTX-1800
 Main S/N: 8892011
 Remote S/N: 8892012
 Main Adapter: DTX-CHA001
 Remote Adapter: DTX-CHA001

Wire Map (T568B)



PASS





Length (ft), Limit 328	[Pair 45]	333
Prop. Delay (ns), Limit 555		530
Delay Skew (ns), Limit 50		33
Resistance (ohms)	[Pair 12]	16.8
Insertion Loss Margin (dB)	[Pair 12]	3.5
Frequency (MHz)	[Pair 12]	500.0
Limit (dB)	[Pair 12]	49.3

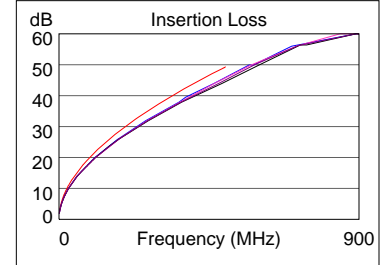



	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	36-45	12-36	36-45	12-36
NEXT (dB)	6.4	8.8	6.4	13.0
Freq. (MHz)	498.0	56.8	498.0	472.0
Limit (dB)	26.1	44.1	26.1	26.8
Worst Pair	36	36	36	36
PS NEXT (dB)	8.3	9.9	8.3	13.6
Freq. (MHz)	496.0	57.8	496.0	472.0
Limit (dB)	23.3	41.2	23.3	23.9

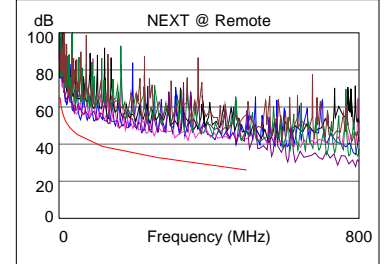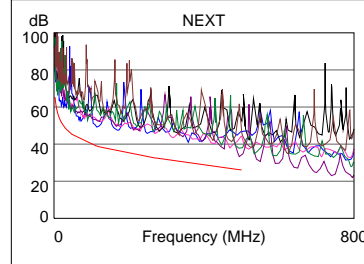



	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	36-78	36-78	12-36	36-12
ACR-F (dB)	9.3	9.2	12.2	11.4
Freq. (MHz)	1.9	1.9	472.0	472.0
Limit (dB)	57.8	57.8	9.8	9.8
Worst Pair	36	36	36	36
PS ACR-F (dB)	11.3	11.3	13.9	14.9
Freq. (MHz)	2.8	2.8	467.0	476.0
Limit (dB)	51.5	51.5	6.9	6.7

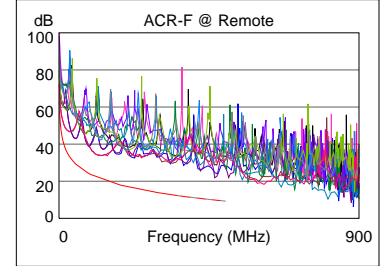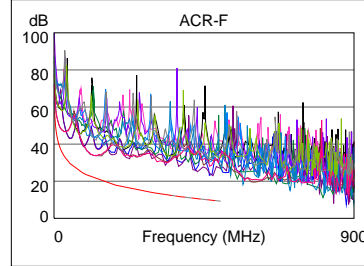

	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
N/A				
Worst Pair	12-36	12-36	36-45	12-36
ACR-N (dB)	9.3	10.2	10.8	17.2
Freq. (MHz)	21.8	56.8	498.0	472.0
Limit (dB)	41.5	28.5	-23.1	-21.0
Worst Pair	36	36	36	12
PS ACR-N (dB)	10.7	10.8	13.0	17.1
Freq. (MHz)	14.9	20.6	498.0	472.0
Limit (dB)	43.2	39.5	-25.9	-23.9

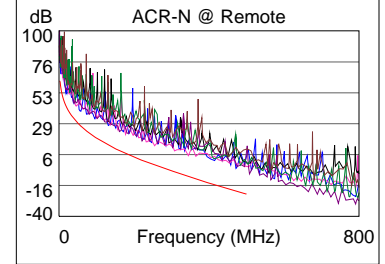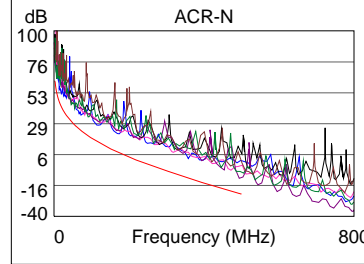

	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	12	12	36	12
RL (dB)	5.7	5.7	6.4	11.3
Freq. (MHz)	5.0	2.6	465.0	469.0
Limit (dB)	19.0	19.0	6.0	6.0

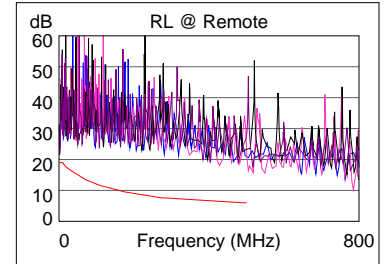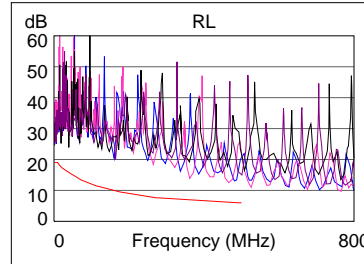

Compliant Network Standards:
 10BASE-T 100BASE-TX 100BASE-T4
 1000BASE-T 10GBASE-T ATM-25
 ATM-51 ATM-155 100VG-AnyLan
 TR-4 TR-16 Active TR-16 Passive



Cable ID: DINTEK-6A-UTP-CH6

Test Summary: PASS


Date / Time: 10/04/2009 08:51:47pm
 Headroom: 7.4 dB (NEXT 36-45)
 Test Limit: TIA Cat 6A Channel
 Cable Type: Cat 6A UTP

Operator: Your Name
 Software Version: 2.2200
 Limits Version: 1.3700
 NVP: 68.2%


Model: DTX-1800
 Main S/N: 8892011
 Remote S/N: 8892012
 Main Adapter: DTX-CHA001
 Remote Adapter: DTX-CHA001

Wire Map (T568B)



PASS





Length (ft), Limit 328	[Pair 45]	330
Prop. Delay (ns), Limit 555		523
Delay Skew (ns), Limit 50		31
Resistance (ohms)	[Pair 12]	16.6
Insertion Loss Margin (dB)	[Pair 78]	4.3
Frequency (MHz)	[Pair 78]	500.0
Limit (dB)	[Pair 78]	49.3

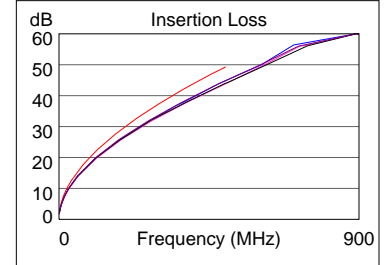



	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	36-45	36-45	36-45	36-45
NEXT (dB)	7.4	9.3	7.4	9.5
Freq. (MHz)	496.0	448.0	496.0	469.0
Limit (dB)	26.2	27.4	26.2	26.9
Worst Pair	36	45	36	45
PS NEXT (dB)	8.4	10.5	8.4	10.8
Freq. (MHz)	496.0	448.0	496.0	469.0
Limit (dB)	23.3	24.5	23.3	24.0

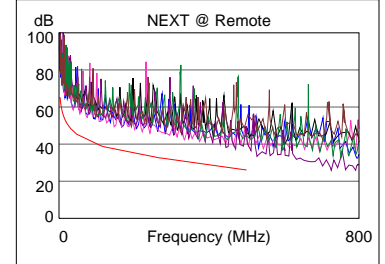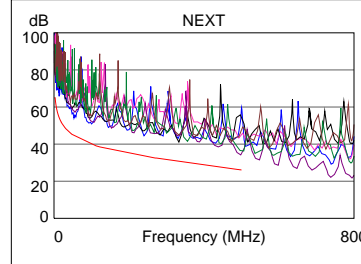



	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	36-78	36-78	12-36	36-12
ACR-F (dB)	11.2	11.3	14.2	13.3
Freq. (MHz)	2.9	2.8	489.0	489.0
Limit (dB)	54.1	54.5	9.5	9.5
Worst Pair	36	36	36	36
PS ACR-F (dB)	11.8	11.7	15.7	15.6
Freq. (MHz)	2.5	2.6	487.0	496.0
Limit (dB)	52.3	51.9	6.5	6.3

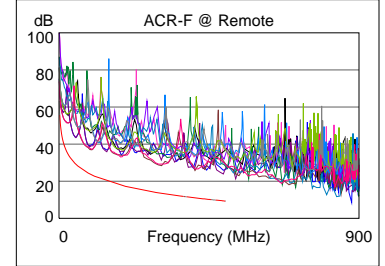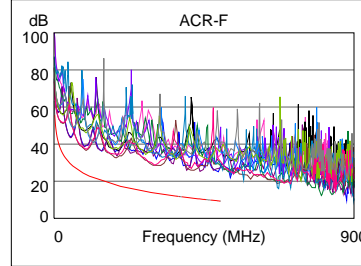

	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
N/A				
Worst Pair	12-36	12-36	36-45	36-45
ACR-N (dB)	9.6	12.4	12.6	15.5
Freq. (MHz)	4.5	37.8	496.0	487.0
Limit (dB)	57.8	34.4	-22.9	-22.2
Worst Pair	12	12	36	36
PS ACR-N (dB)	10.0	11.8	14.1	16.9
Freq. (MHz)	3.4	37.8	498.0	489.0
Limit (dB)	57.9	31.7	-25.9	-25.2

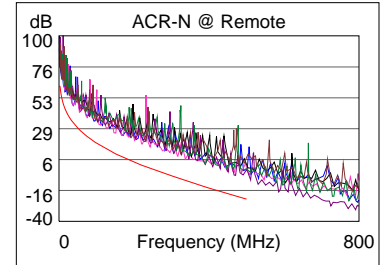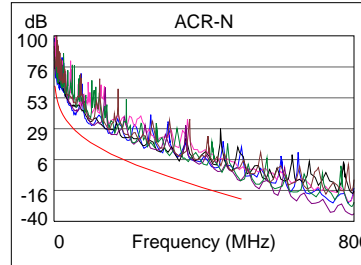

	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	12	12	36	12
RL (dB)	4.8	6.5	7.6	9.5
Freq. (MHz)	5.0	3.4	469.0	469.0
Limit (dB)	19.0	19.0	6.0	6.0

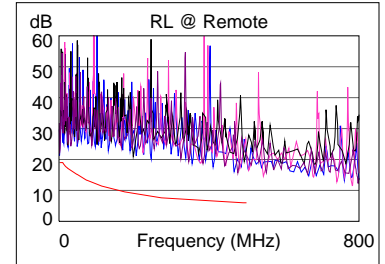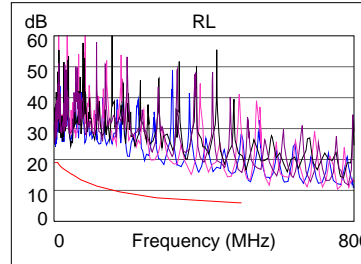

Compliant Network Standards:
 10BASE-T 100BASE-TX 100BASE-T4
 1000BASE-T 10GBASE-T ATM-25
 ATM-51 ATM-155 100VG-AnyLan
 TR-4 TR-16 Active TR-16 Passive



Cable ID: DINTEK-6A-UTP-CH7

Test Summary: PASS


Date / Time: 10/04/2009 08:52:48pm
Headroom: 6.9 dB (NEXT 36-45)
Test Limit: TIA Cat 6A Channel
 Cable Type: Cat 6A UTP

Operator: Your Name
 Software Version: 2.2200
 Limits Version: 1.3700
 NVP: 68.2%


Model: DTX-1800
 Main S/N: 8892011
 Remote S/N: 8892012
 Main Adapter: DTX-CHA001
 Remote Adapter: DTX-CHA001

Wire Map (T568B)



PASS





Length (ft), Limit 328	[Pair 45]	329
Prop. Delay (ns), Limit 555		530
Delay Skew (ns), Limit 50		40
Resistance (ohms)	[Pair 12]	16.8
Insertion Loss Margin (dB)	[Pair 12]	1.9
Frequency (MHz)	[Pair 12]	500.0
Limit (dB)	[Pair 12]	49.3

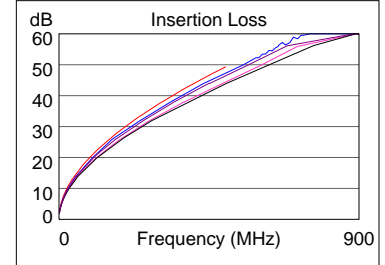



	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	36-45	36-45	36-45	36-45
NEXT (dB)	6.9	8.6	6.9	8.6
Freq. (MHz)	496.0	489.0	496.0	489.0
Limit (dB)	26.2	26.4	26.2	26.4
Worst Pair	36	36	36	36
PS NEXT (dB)	8.3	9.8	8.3	10.1
Freq. (MHz)	494.0	469.0	494.0	490.0
Limit (dB)	23.4	24.0	23.4	23.5

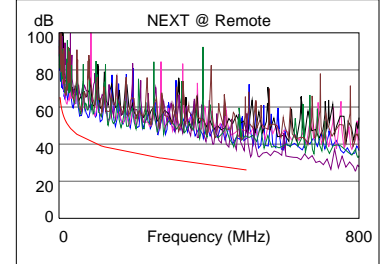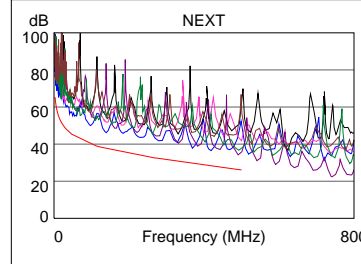



	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	36-78	36-12	36-12	36-12
ACR-F (dB)	11.8	9.9	12.7	9.9
Freq. (MHz)	64.5	474.0	483.0	474.0
Limit (dB)	27.1	9.7	9.6	9.7
Worst Pair	36	36	36	36
PS ACR-F (dB)	13.4	13.3	14.8	14.2
Freq. (MHz)	3.4	3.1	500.0	483.0
Limit (dB)	49.7	50.4	6.3	6.6

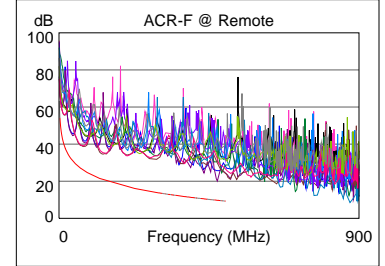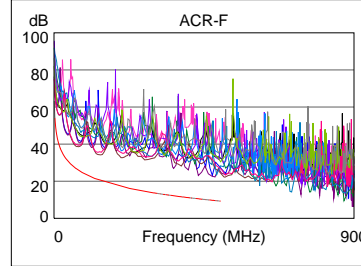

	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
N/A				
Worst Pair	12-36	12-45	36-45	36-45
ACR-N (dB)	9.0	11.2	12.4	14.4
Freq. (MHz)	4.4	20.4	496.0	490.0
Limit (dB)	58.1	42.3	-22.9	-22.4
Worst Pair	36	12	36	36
PS ACR-N (dB)	10.5	11.0	13.4	15.1
Freq. (MHz)	3.3	18.8	494.0	490.0
Limit (dB)	58.2	40.6	-25.6	-25.3

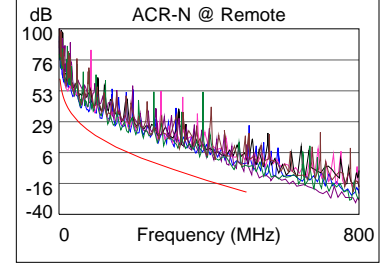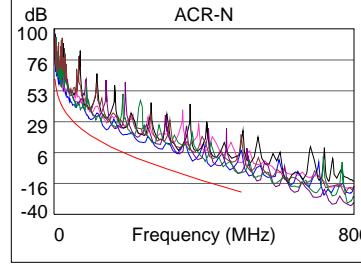

	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	36	12	36	12
RL (dB)	7.0	6.2	7.0	11.9
Freq. (MHz)	465.0	2.5	465.0	469.0
Limit (dB)	6.0	19.0	6.0	6.0

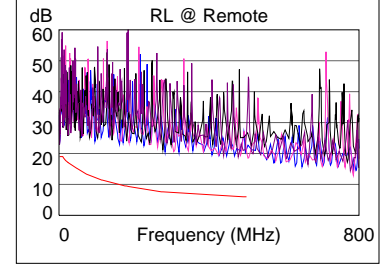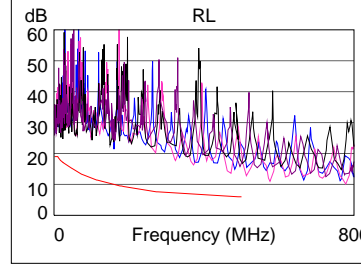

Compliant Network Standards:
 10BASE-T 100BASE-TX 100BASE-T4
 1000BASE-T 10GBASE-T ATM-25
 ATM-51 ATM-155 100VG-AnyLan
 TR-4 TR-16 Active TR-16 Passive